

Technical Datasheet

Level Switch Series

Ultrasonic Level Switch

Model: 003

Key Features

- Relay or solid-state output
- Corrosion resistant PPS construction
- 1-in. or 3/4-in. threaded mounting
- Small in-tank dimensions
- 24 Vac or dc powered
- Lightweight
- No moving parts

Series Overview

The 003 sensor is a highly reliable level switch with no moving parts.

Comprising a one piece moulded body with an integral PCB, the 003 Level Switch is factory sealed and supplied with a flying lead for customer connection.

The sensor is designed for high or low level alarm duties to give a voltage free contact or solid state transistor output for alarm signalling or as part of a pump control system.

Other products

Other products we can offer :

- Ultrasonic GAP sensors
- Mechanical level switches

**CE**

Product applications

- Low level alarms in header tanks
- Pump control duty in feeder tanks
- High or low alarms in storage tanks
- Level or pump control in storage tanks
- Small or thin wall tanks
- Bund level detection
- Steering gear oil
- Chemical and water treatment applications




How can we help you?

Delta Mobrey offers fast, efficient and knowledgeable support when and where you need it. Please visit our website at www.delta-mobrey.com to find your local support centre or call us on:

+44 (0)1252 729140

How to order

Switches can be configured by selecting codes representing the desired features from the tables that follow. The chart below, describes how the model code is built up. For assistance in configuring a switch that best suits your needs, please contact your local sales office.

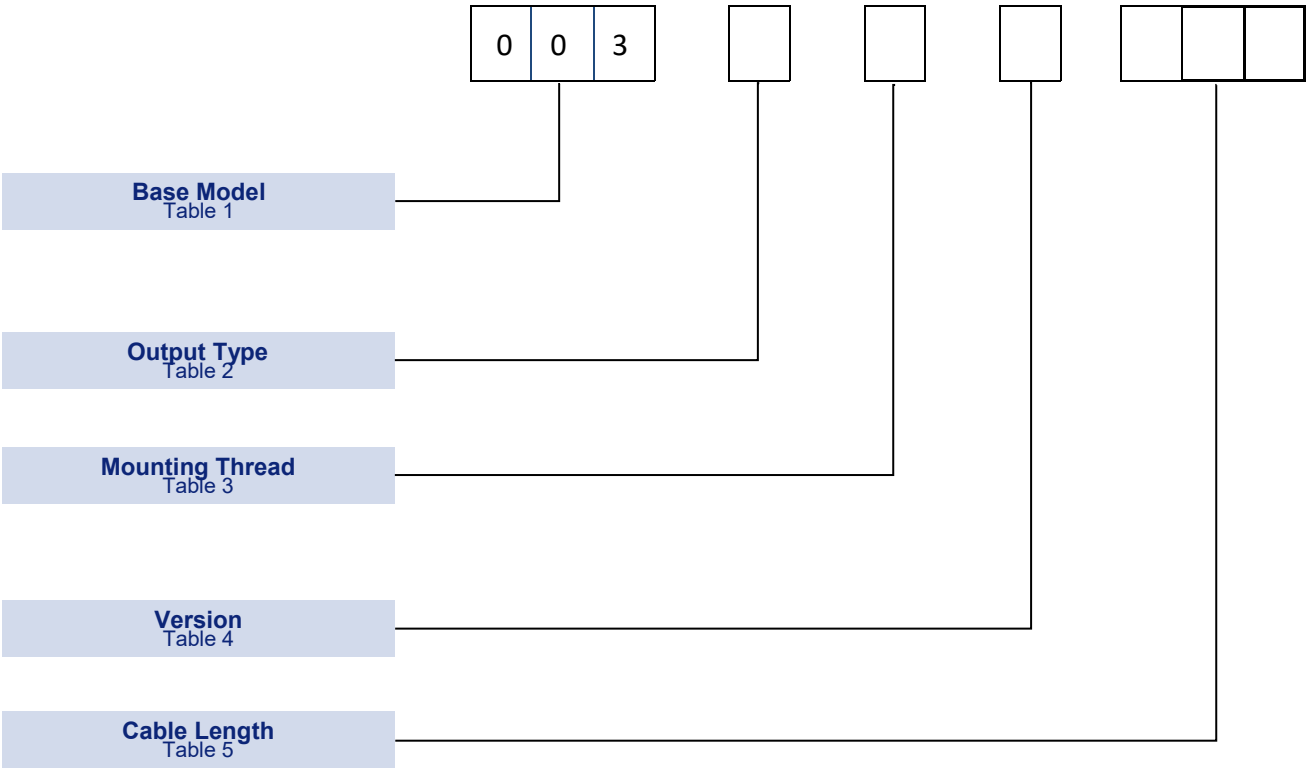

Body of the instrument shows as minimum the marking below listed

- Series (according to codes in table 1)
- Type of output (according codes in table 2)
- Process connection size (according to codes in table 3)

Version, Cable Length and Description of Special Engineering, are shown on the commercial documentation supplied with the instrument.

Models

For standard applications up to 5 bar (72psi)

TABLE 1	0	0	3						
---------	---	---	---	--	--	--	--	--	--

Description	Code
General Purpose The body is Polyphenylene Sulphide (PPS), with weather protection not less than NEMA type 6P, IP66/IP68.	003

Output Type

TABLE 2	0	0	3						
---------	---	---	---	--	--	--	--	--	--

Description	Code
Integral SPCO relay (energised when sensor is wet)	S
Two open-drain FET transistors (one conducting when sensor is wet; and the other conducting when the sensor	H

Mounting Thread

TABLE 3	0	0	3						
---------	---	---	---	--	--	--	--	--	--

Description	Code
3/4" BSPT (dual)	0
1" BSPT (dual)	2
1"-11 NPTM (dual)	5

Version

TABLE 4	0	0	3						
---------	---	---	---	--	--	--	--	--	--

Description	Code
General purpose ¹	W
Marine ²	M

¹ Cable, 5 core 7/0.2mm, PVC sheathed

² Cable, 5 core 19/0.2mm, Screened and Jacketed

Cable Length

TABLE 5	0	0	3						
---------	---	---	---	--	--	--	--	--	--

Description	Code
3 metres	/M03
TBA	/M--

3 metres minimum, 50 metres maximum

Special Engineering

For these instruments, we have many other options already designed and configured, for example:

- Carbon Fibre body
- Alternative cables, including low smoke or halogen free
- Sensor with the relay output energized dry

Other options can also be designed to meet specific requirements of an application. Please contact us for further information.

Technical Specification

003 ULTRASONIC TYPE SWITCHES	003S		003H	
	Operating Pressure	5 Bar (72.5psi)	Operating Pressure	5 Bar (72.5psi)
	Ambient and Operating Temperature	-20 to 70°C (-4 to 158°F)	Ambient and Operating Temperature	-40 to 105°C (-40 to 221°F)
	Minimum Specific Gravity	0.50	Minimum Specific Gravity	0.50
	Maximum Viscosity	5000Cst at 20°C (68°F)	Maximum Viscosity	5000Cst at 20°C (68°F)
	Switching response	50ms dry/wet, 0.5s wet/dry	Switching response	50ms dry/wet, 0.5s wet/dry
	Hysteresis	<4mm (0.12 in.)	Hysteresis	<4mm (0.12 in.)
	Repeatability	+/- 2mm (0.08 in.)	Repeatability	+/- 2mm (0.08 in.)
	Switching function	SPCO relay (energized Wet)	Switching function	2 x FET open drain (short circuit protected).
	Maximum switching current	1A resistive, 0.2A inductive	Maximum switching current	100mA max
	Maximum switching voltage	30V	Maximum switching voltage	30V
	Power Supply	18 to 30 Vdc/ac	Power Supply	18 to 30 Vdc/ac
	Current drawn when dry	10mA nominal	Current drawn when dry	8mA nominal (4mA minimum)
	Current drawn when wet	25mA maximum	Current drawn when wet	16mA nominal (20mA maximum)
	IP rating	IP66/68 (3m) – NEMA 6P (10ft)	IP rating	IP66/68 (3m) – NEMA 6P (10ft)
	Overall Length	110 mm (4.33 in.)	Overall Length	110 mm (4.33 in.)
	Length into Tank	79 mm (3.11 in.)	Length into Tank	79 mm (3.11 in.)
	Body Diameter	22 mm (0.87 in.)	Body Diameter	22 mm (0.87 in.)
	Weight (with 3m of Cable)	0.2 kgs	Weight (with 3m of Cable)	0.2 kgs

Approvals

EUROPEAN DIRECTIVES



Electromagnetic Compatibility Directive (EMC) 2014/30/EU.

This product is compliant with the directive. EN 61326-1:2013

Restriction of Hazardous Substances Directive (RoHS) 2011/65/EU.

This product is compliant with the directive

Low voltage Directive (LVD) 2014/35/EU.

This product is outside the scope of the directive as it designed for a voltage less than 50Vac and 75Vdc.

Pressure Equipment Directive (PED) 2014/68/EU:

This product is outside the scope of the directive as it does not enclose a volume (Pressure Equipment Directive Guideline, A-40)

MARINE

DNV

Certificate no. TAA0000140 (003**M/*)

DNV rules for classification –Ships, offshore units, and high speed and light craft

Location classes: Temperature B

Humidity B

Vibration A

EMC A

Enclosure C / IP66

D /IP68 (3m)

Dimensions

Figure 1. 003S* Schematic



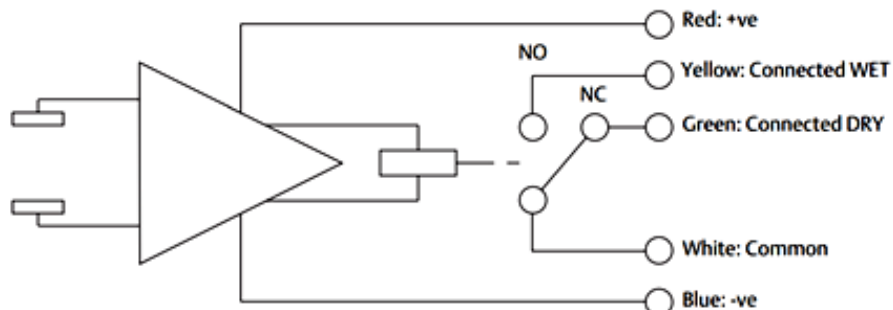


Figure 2. 003H* Schematic

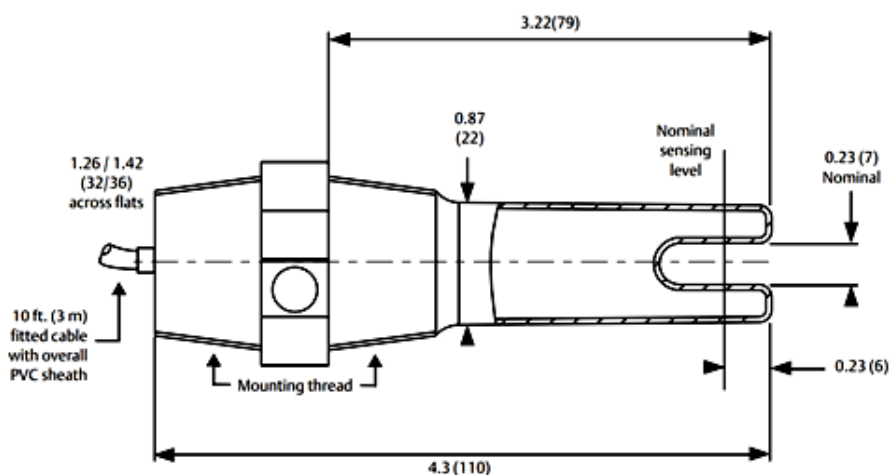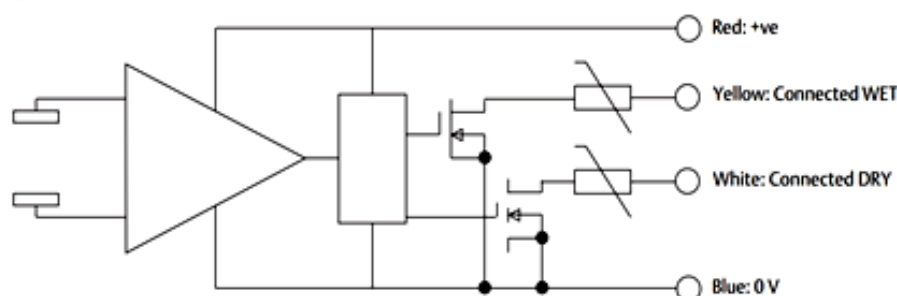

Dimensions are in inches (mm) unless otherwise stated.

BESTOBELL
AQUATRONIX
SINCE/DEPUIS 1953

Head Office

2880 Argenta Road, Unit 3
Mississauga, ON L5N 7X8
salesdesk@bestobell.com
1-800-668-3979
www.bestobell.com

Since 1953, Quality Products to Sense, Measure & Control
Depuis 1953, Produits De Qualités Pour Détecter, Mesurer & Contrôler

Montréal Office
970 Montée de Liesse, #204
St.Laurent, QC H4T 1W7
ventes@bestobell.com
1-877-331-1225

Atlantic Office
166 North Side Road
Riverport, NS B0J 2W0
dmossman@bestobell.com
902-529-0355

ISO9001



FM00720

Page 6 of 6

Delta Mobrey Limited

Hudson House, Albany Park Camberley Surrey, GU16 7PL, UK.

T+44 (0)12 5272 9140 F+44 (0)12 5272 9168 E sales@delta-mobrey.com W www.delta-mobrey.com