

Model S410 ProcessProbe® pH and ORP Sensors with Recessed Bulb

Applications

In-Line and Submersion

Description


The S410 is a sealed sensor, with a recessed bulb, designed for rugged service in submersion or on-line applications. The body, with an integral 3/4" NPT insertion thread, is molded from chemical-resistant Ryton® (PPS) and the reference junction is porous Teflon®. The Double Junction Reference system reliably prevents process contaminants from fouling the reference and is highly resistant to poisoning. The S410 features built-in solution ground and temperature compensation in addition to custom cable lengths and a choice of connectors.

Options Include

- Built-in temperature compensation
- Built-in solution ground
- Custom cable lengths
- Choice of cable connectors

SPECIFICATIONS

pH Range	0–14 pH
ORP Range	± 5000 mV
Temp Range	0–105°C
Max Pressure/Temp	150 psig at 100°C
Reference	Ag/AgCl
Wetted Materials	Ryton, Teflon, and Glass
Standard Cable Length	10 feet
Maximum Flow Rate	10 ft (3 m) per second
Output Impedance	<250 megohms at 25°C
Insertion Threads	3/4" NPT

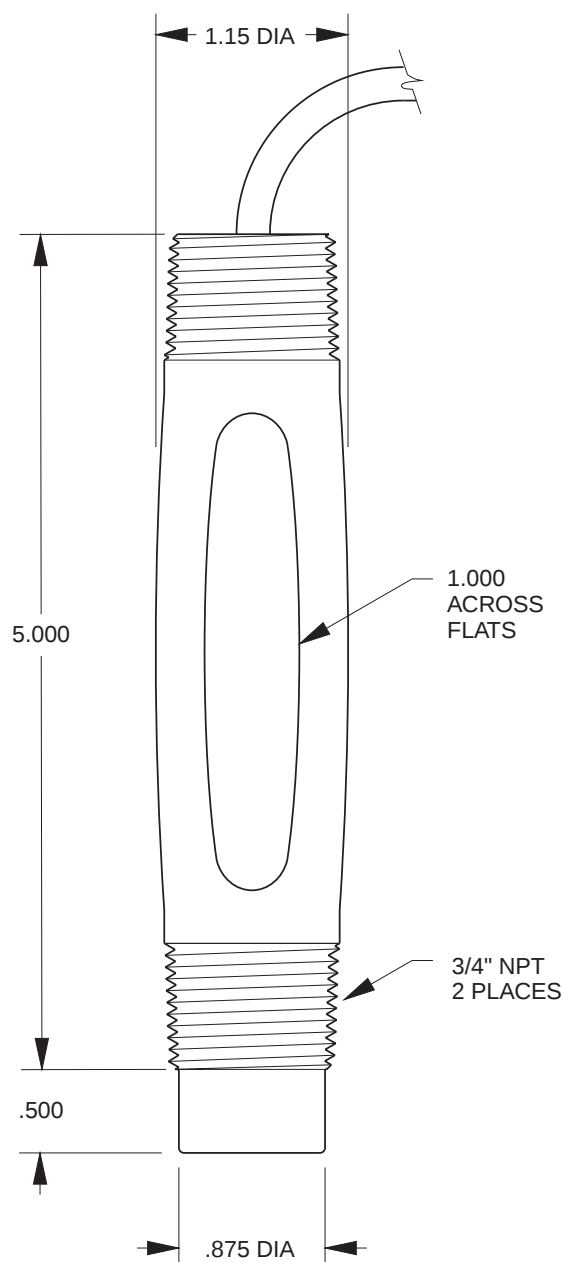

Model S410 ProcessProbe® pH and ORP Sensors with Recessed Bulb

Part Number Selection Guide

Specify ProcessProbe® Part Number here:

Category Position:

S-4 ¹ ² - ³ ⁴ ⁵ ⁶ ⁷ - ⁸ ⁹ ¹⁰ ¹¹ ¹²

OPTIONS:

1 - 2 Body Style:

[10] Standard Insertion, No Guard, 3/4" NPT.

3 Body Material:

[R] Ryton®

[G] Grounded *(see note below)

4 Liquid Junction:

[T] Coaxial Teflon®

[R] Recessed Coaxial Teflon® (only available on probes without T.C.)

5 - 6 Measurement Electrode:

[33] pH, HT-3 Rugged Dome Bulb

[43] pH, HT-4 High pH Bulb (for pH 13 and above)

[PB] ORP, Platinum Band

[17] pH, General Purpose, Flat Bulb

7 Temperature Compensator:

[0] T.C. not required

[1] 3K Ohms, used on older models of TBI/Bailey and Uniloc transmitters

[9] 301 Ohms for use with older Great Lakes models, such as 60, 70, 90, 570 and 690

[D] Pt 1000 Ohms for Rosemount (Uniloc) Model, 1054, Beckman SoluComp, TBI/Bailey TB82 and TB84, Foxboro Models 870 and 874, Yokogawa and many European models

[H] Pt 1000 Ohms for Yokogawa, Conducta, Polymetron and many European models

8 Cable Type:

[A] 3 mm Low Noise Coax, for pH without built-in TC, or for ORP

[M] 5 mm Low Noise Coax, for pH without built-in TC, or for ORP

[E] Jacketed coax w/ T.C. leads

[N] Jacketed coax w/ T.C. and solution ground leads

9 - 10 Cable Length:

[10] 10 ft - standard length

[XX] Specify length (in feet) if other than standard (see above for price adder per foot)

11 - 12 Sensor Connectors:

[BC] BNC only (for use with ORP electrodes or with sensors w/o TC or solution ground)

[FB] BNC for pH and Ferrules on all other leads (for use with Terminal Block or Terminal Strip)

[FF] All Ferrules connectors (for use with Terminal Block or Terminal Strip)



Manufacturers of pH & DO Sensors for Science and Industry
19 Thomas, Irvine, California 92618 USA

BEP-Bestobell / Bestobell-Aquatronix
970 Montée de Liesse, #204
St. Laurent, QC, H4T 1W7
Tél. 514-331-1225 / Fax 514-331-4255
www.bestobell.com

BEP-Bestobell / Bestobell-Aquatronix
2880 Argentia Road, Unit 3
Mississauga, ON, L5N 7X8
Tel. 905-826-1953 / Fax 905-826-1778
www.bestobell.com